

ORBE 10L+ 5CCT Pendant

3-647-56

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-56 Brushed Brass

LIGHT SOURCE	(10) 3 Watt LED Modules 90CRI
LUMINAIRE POWER	TBD
RATED LIFE	50000 RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	TBD (LM-79)
INPUT VOLTAGE	120 - 277V AC
DRIVER OUTPUT	TBD
DIMMING	TRIAC dimming
CONSTRUCTION	CRS/Glass
DIFFUSER	Glass
FINISHES	-56 Brushed Brass
MOUNTING	Unit Mounts to a 4" Octagonal J-Box.
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

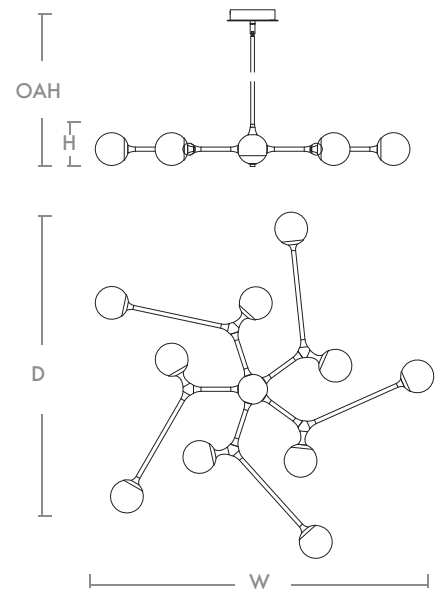

DIMENSIONS

W: 45.625" x 44.625" **D**

H: 5.125"

OAH: Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height.

