



LUNA 5CCT Pendant
3-6710-xx




FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____

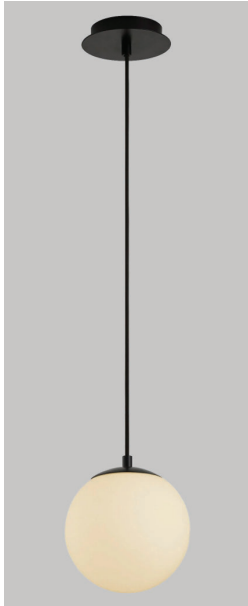


-15 Black

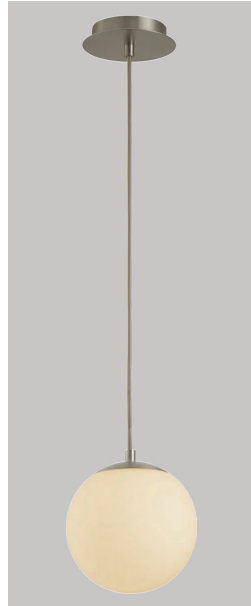

-24 Satin Nickel

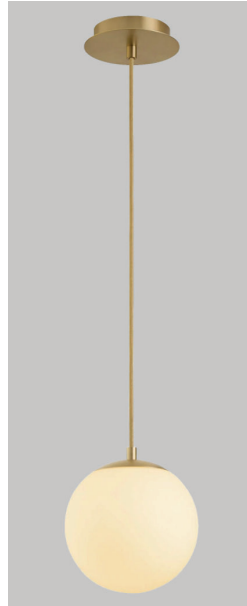


-40 Aged Brass

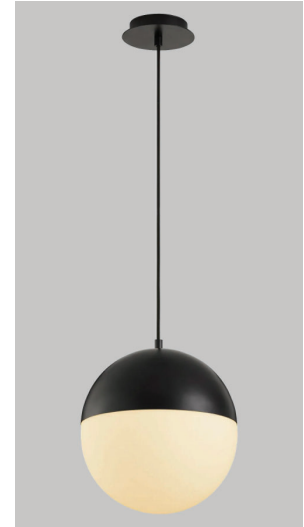

OPTIONAL DOME (included)
 (Shown: -15 Black)

LIGHT SOURCE	1 x 6W LED, 3000K, CRI 90
LUMINAIRE POWER	6W
RATED LIFE	50000 hr RL
COLOR TEMPERATURE	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	Delivered: 490lm @3000K (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	130mA, 10W max power
DIMMING	TRIAC at 120V AC Only
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass. Optional dome included
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box*
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

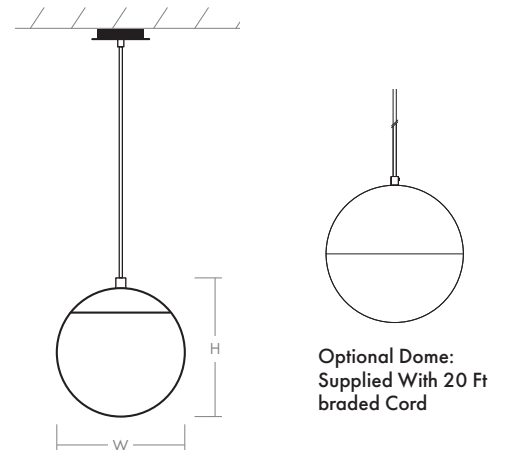

DIMENSIONS
Dia. Canopy: 5.88"
W. Fixture: 8.00"
H. Fixture: 9.50"
Supplied with 20 ft braided cord

