

**LUNA 5CCT Pendant**  
**3-6730-xx**



FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-15 Black



-24 Satin Nickel




-40 Aged Brass

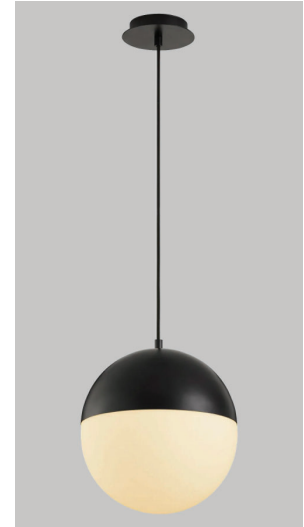

OPTIONAL DOME (included)  
 (Shown -15 Black)

<b>LIGHT SOURCE</b>	1 x 10W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	10W
<b>RATED LIFE</b>	50000 hr RL
<b>COLOR TEMPERATURE</b>	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
<b>LUMEN OUTPUT</b>	Delivered: 900lm @3000K (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	250mA, 10W max power
<b>DIMMING</b>	TRIAC at 120V AC Only
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- White Opal Glass. Optional dome included.
<b>FINISHES</b>	Black (-15), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box*
<b>STANDARDS</b>	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

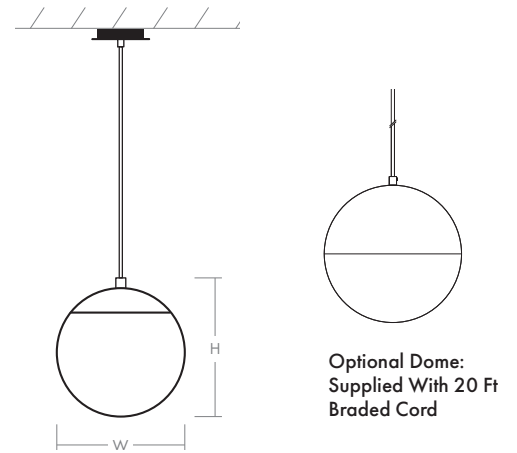

**DIMENSIONS**  
**Dia. Canopy: 5.88"**  
**W. Fixture: 11.88"**  
**H. Fixture: 12.63"**  
**Supplied with 20 ft  
 braided cord**

