

**RICKIE Outdoor**  
**3-765-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black



-16 Brushed Aluminum

**LIGHT SOURCE** (12x) 1.5w LED Arrays, 3000K, CRI 90

**LUMINAIRE POWER** 11.7W at 120V

**RATED LIFE** 50000 hr RL

**OPTIONAL COLOR TEMPERATURES** 3000K Only

**LUMEN OUTPUT** Initial: 1200 lm

**INPUT VOLTAGE** 100V to 277V AC, 50/60Hz

**DRIVER OUTPUT** 450mA, 18W max power

**DIMMING** Non-dimmable


**CONSTRUCTION** Cast Aluminum Housing

**DIFFUSER** - Clear Glass

**FINISHES** Black (-15), -16 Brushed Aluminum

**MOUNTING** 4" Octagonal J-Box  
(Installer must provide a bead of caulk between fixture housing and mounting surface)

**STANDARDS** ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

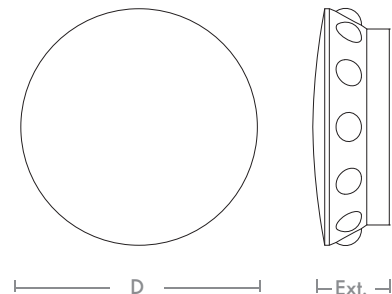

**DIMENSIONS**

**Dia.:** 8.00"

**Ext:** 2.5"

**M.C:** 4" From top of fixture

