

VIVO 1LT LED Pendant

3-809-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black



-40 AGB

LIGHT SOURCE	(1) X 8W LED Array, Selectable Color Temp., CRI 90
LUMINAIRE POWER	6.45W
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	Selectable (CCT) 3000/3500/4000K
LUMEN OUTPUT	624 lumens (LM-79)
INPUT VOLTAGE	120V-277
DRIVER OUTPUT	9W
DIMMING	TRIAC and ELV dimming at 120V AC
CONSTRUCTION	Cold Rolled Steel Housing
DIFFUSER	- Clear with White Faceted Glass
FINISHES	-15 Black, -40 AGB
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

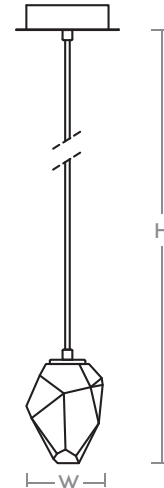

DIMENSIONS

W: 4.75"
H: Adjustable

Note:

Order example for standard fixture:
3-809-15 (x-xxx: LED Sequence # / -xx: Finish)

