

FAVO 5CCT Pendant

3-81-56

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-56 Brushed Brass

LIGHT SOURCE	(1) 30 Watt LED Array 90CRI
LUMINAIRE POWER	27.4 W
RATED LIFE	50000 HR RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	1059 lm (Lm-79)
INPUT VOLTAGE	120-277v
DRIVER OUTPUT	32W Max
DIMMING	TRIAC Dimming 10-100%
CONSTRUCTION	CRS, Glass
DIFFUSER	White Glass
FINISHES	-56 Brushed Brass
MOUNTING	Unit mounts to a 4" Octagonal Jox
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

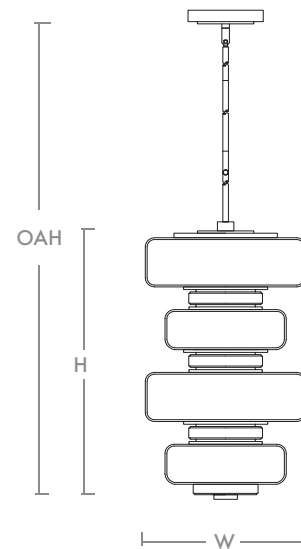

DIMENSIONS

W: 13.5"
H: 24"
OAH: Fixture Supplied w/ 2-8"
2-12" and 3-15" Stems to
Customize hanging ht.

