

VIVO 5LT LED Pendant 3-810-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-15 Black




-15 Black




-40 AGB

LIGHT SOURCE	(5) X 8W LED Array, Selectable Color Temp, CRI 90
LUMINAIRE POWER	37.74 W
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	Selectable (CCT) 3000/3500/4000K
LUMEN OUTPUT	37.17 LUMENS (lm-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	45W
DIMMING	TRIAC and ELV dimming at 120V AC
CONSTRUCTION	Cold Rolled Steel Housing
DIFFUSER	-Clear with White Faceted Glass
FINISHES	-15 Black, -40 AGB
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.



W

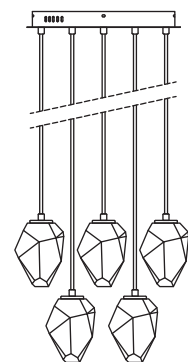

H

DIMENSIONS

W: 15.25"
H: Adjustable

Note:

Order example for standard fixture:
3-810-15 (x-xxx: LED Sequence # / -xx: Finish)

