

AVIAN 4L 5CCT Pendant

3-8145-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-40 Aged Brass



-15 Black

LIGHT SOURCE	(4) 7.5 Watt LED Array 90CRI
LUMINAIRE POWER	26.26W
RATED LIFE	50000 Hr RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	1554 lm (Lm-79)
INPUT VOLTAGE	120-277V AC
DRIVER OUTPUT	30w Max
DIMMING	Trailing Edge (ELV) Dimming
CONSTRUCTION	CRS, Glass, Acrylic
DIFFUSER	Textured Glass
FINISHES	-15 Black, -56 Brushed Brass
MOUNTING	Unit mounts to a 4" Octagonal Jox
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

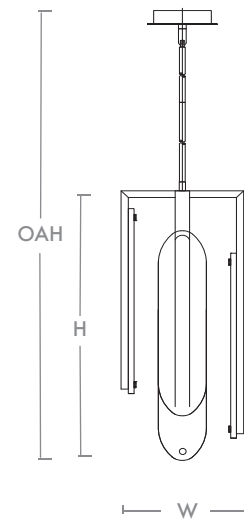

DIMENSIONS

W: 10"

H: 24"

OAH: Fixture Supplied w/ 2-8"
2-12" and 3-16" Stems to
Customize hanging ht

Order example for standard fixture:

3-8145-15 (x-xxx: LED Sequence # / -xx: Finish)

