

BOREALIS 5CCT Pendant

3-892-15

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-56 Brushed Brass

LIGHT SOURCE	84W Total, LED Strips 90CRI
LUMINAIRE POWER	84W
RATED LIFE	50000 RL
COLOR TEMPERATURES	Field Selectable 2700/3000/4000/ 5000/6500 CCT Note: Oxygen standard setting 3000k
LUMEN OUTPUT	8200 Initial Lumen at 3000K
INPUT VOLTAGE	120 - 277V AC
DRIVER OUTPUT	40W
DIMMING	TRIAC dimming
CONSTRUCTION	CRS/Acrylic/Leather
DIFFUSER	Translucent White Acrylic
FINISHES	-15 Black
MOUNTING	Unit Mounts to a 4" Octagonal J-Box.
STANDARDS	Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

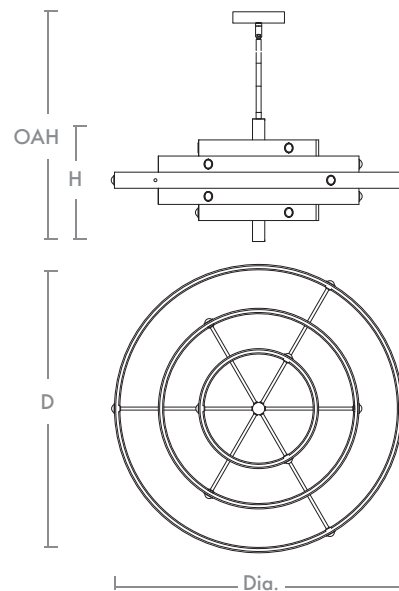

DIMENSIONS

Dia: 36"

H: 15"

OAH: Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height.

